


# SLUN

## VERTICAL SWING LIFT-UP MECHANISM

- Unique swing mechanism provides a lift-assist feature to help lift doors and hold at the open position.
- Sleek, compact design provides maximum access.
- Easy installation.
- Adjustable arm mounting plate.
- Successfully passed for 30,000 open/close private cycle tests.

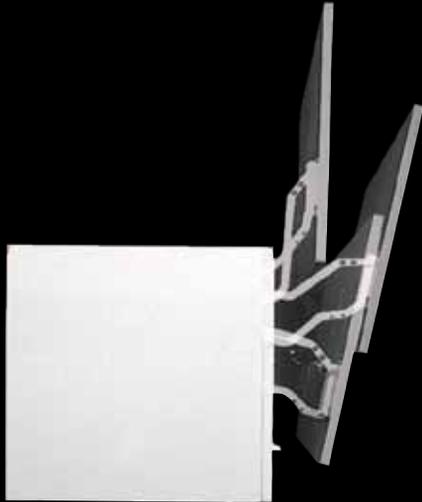

Designed to operate at room temperature  
0°~40°C (32°~104°F).



# VERTICAL SWING LIFT-UP MECHANISM




**SLUN**

LID SUPPORTS

VERTICAL SWING LIFT-UP MECHANISM



- Unique mechanism will help lift doors and hold at the open position.
- Sleek & compact design.
- Easy installation.
- Adjustable arm mounting plate.
- Patented LAPCON technology provides a smooth and quiet motion.
- Successfully passed 30,000 open/close private cycle tests.
- Recommended Door Size and Weight:
  - Width, 600~900 mm (23-5/8"~35-7/16")
  - Height, 390~450 mm (15-23/64"~17-23/32")
  - Weight, 2.8~5.8 kg (6.2~12.8 lbs)

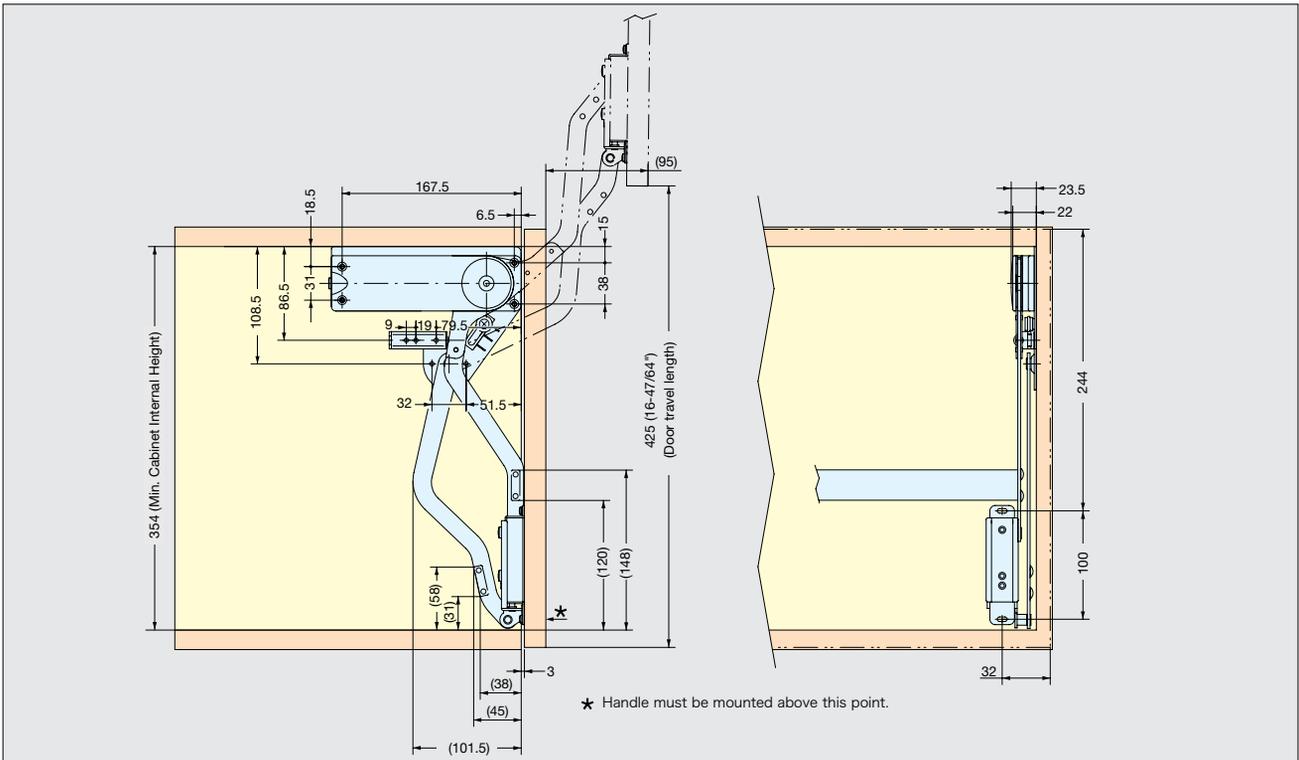

Material	Finish/Color
Steel	Nickel
Plastic	Grey

Item No	Door Weight (kg)	Box (set)	Carton (set)
SLUN-3N	2.8~3.8 ( 6.2~8.4 lbs )	5	50
SLUN-4N	3.8~4.8 ( 8.4~10.6 lbs )		
SLUN-5N	4.8~5.8 (10.6~12.8 lbs)		

Guide Bar Length

Door Type	Cabinet Width (mm)	
	600 ( 23-5/8" )	900 ( 35-7/16" )
Solid Wood Door	535 ( 21-1/16" )	835 ( 32-7/8" )
Frame Door	551 ( 21-3/4" )	851 ( 33-1/2" )

\*SLUB-835 (835 mm (32-7/8")) included unless specified.